


## KML1310

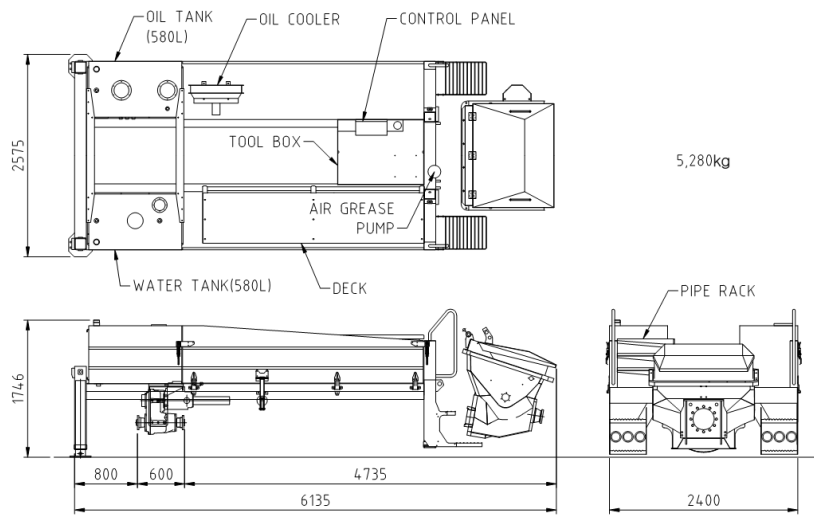

■ Pump specifications		■ Performance diagram	
Engine RPM	1900 rpm		
Maximum output	80(High), 120(Low) m³/h		
Main cylinder	Ø120/ Ø70×1400ST		
Concrete cylinder	Ø200×1400ST		
Cycling system	Hydraulic with manual overrides		
Stroke per minute	30(High), 45(Low)		
Concrete pressure	126(High), 83(Low) bar		
Hopper capacity	0.6 m³		
S-tube	Ø200×Ø180		
Hydraulic pump	Rexroth 190S		
Max. aggregate size	40 mm		
Vertical distance	180M(High), 118(Low) M		
Horizontal distance	315(High), 207(Low) M		
Outrigger	Hydraulic vertical ext.		

© Maximum theoretical values listed.

© Photos and drawings are for illustrative purpose only

© Dimension will vary with different truck makers, models and specifications

© Right to make technical amendments reserved