


## KTP0706

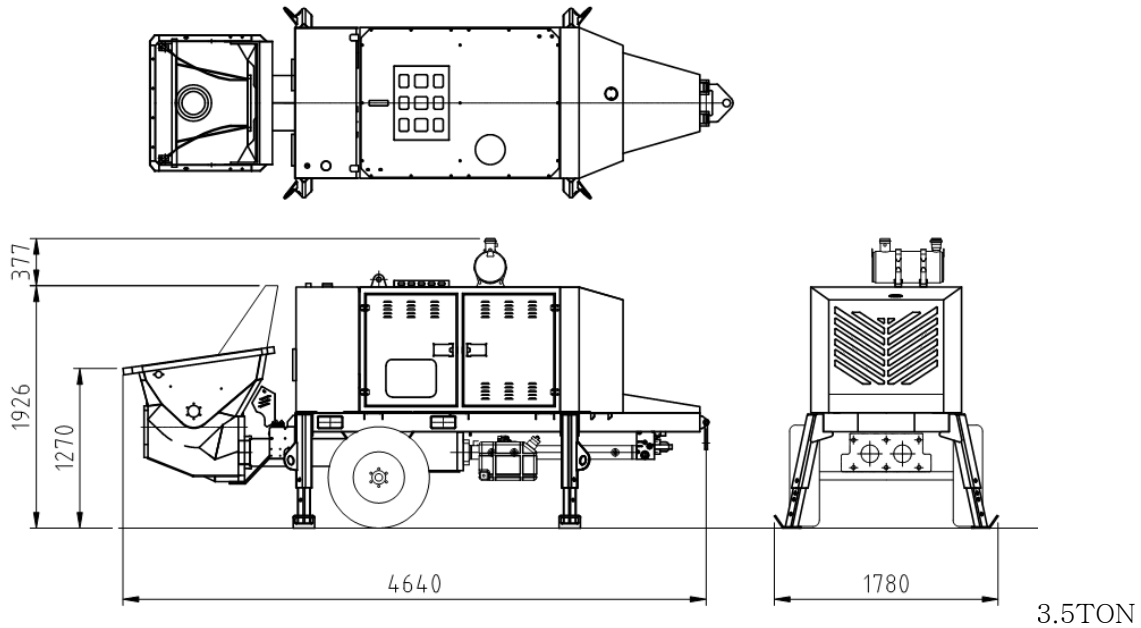

■ Pump specifications		■ Performance diagram	
Engine	PU006(116PS/2800RPM) - DOOSAN		
Engine rpm	1900 rpm		
Maximum output	62 m³/h		
Main cylinder	Ø90/ Ø55×1100ST		
Concrete cylinder	Ø200×1100ST		
Cycling system	Hydraulic with manual overrides		
Stroke per minute	30		
Concrete pressure	70 bar		
Hopper capacity	0.4 m³		
S-tube	Ø180×Ø120		
Hydraulic pump	Kawasaki 112S		
Max. aggregate size	40 mm		
Vertical distance	100 M (slump 8 cm)		
Horizontal distance	175 M (slump 8 cm)		

© Maximum theoretical values listed.

© Photos and drawings are for illustrative purpose only

© Dimension will vary with different truck makers, models and specifications

© Right to make technical amendments reserved