


KTP 0706T

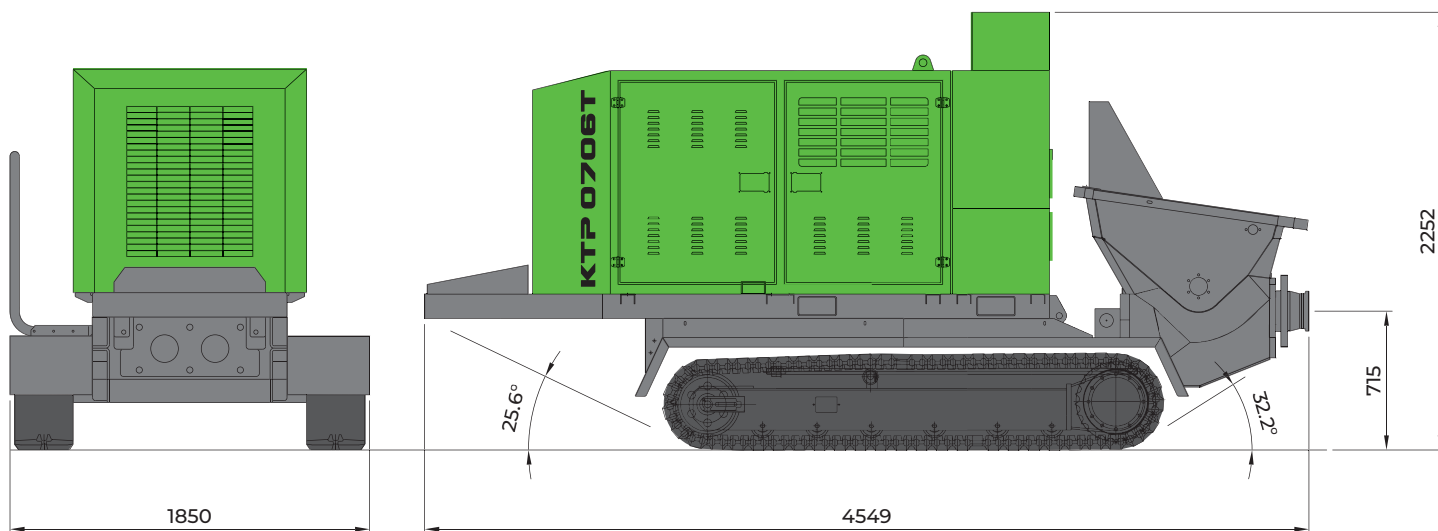

Specifications

Maximum output	70 m ³ /h
Concrete pressure	70 bar
Stroke per minute	36
Main cylinder	Ø90/ Ø55 × 1100ST
Concrete cylinder	Ø200 × 1100ST
Hopper capacity	0.5 m ³
S-tube	Ø180 × Ø120
Max. aggregate size	40 mm
Hydraulic pump	KAWASAKI 117S
Travel motor	LONKING 043, 53:1
Engine	CAT – C3.6 (90KW/121HP)
Engine rpm	1975 rpm
Vertical distance	90 m
Horizontal distance	160 m

- The above details represent theoretical maximum values.
- Photos and drawings are for reference only.
- The above specifications are subject to change due to product improvements or other reasons.

Performance diagram

