


KTP1310

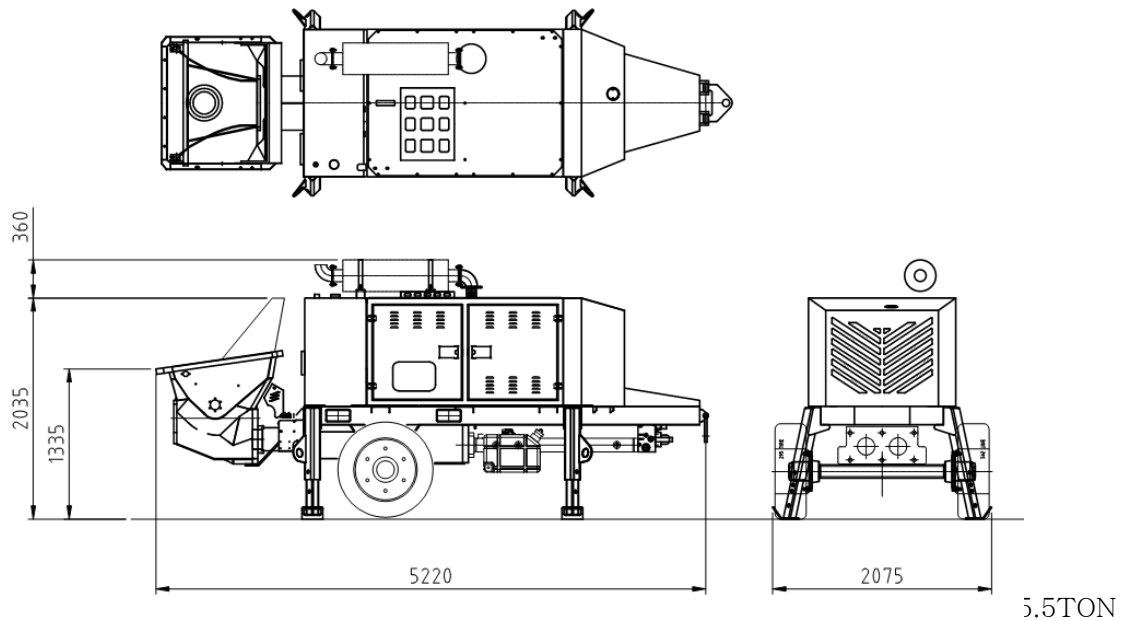

| <div style="display: flex; justify-content: space-between;"> ■ Pump specifications ■ Performance diagram </div> | |
|---|--------------------------------------|
| Engine | PU086T(205PS/2200RPM) - DOOSAN |
| Engine rpm | 1900 rpm |
| Maximum output | 63(High), 96(Low) [m³/h] |
| Main cylinder | Ø120/ Ø70×1400ST |
| Concrete cylinder | Ø200×1400ST |
| Cycling system | Hydraulic with manual overrides |
| Stroke per minute | 24(High), 36(Low) |
| Concrete pressure | 126(High), 83(Low) [bar] |
| Hopper capacity | 0.6 [m³] |
| S-tube | Ø200×Ø180 |
| Hydraulic pump | Kawasaki 200S |
| Max. aggregate size | 40 [mm] |
| Vertical distance | 180(High), 118(Low) [M] (slump 8 cm) |
| Horizontal distance | 315(High), 207(Low) [M] (slump 8 cm) |

Concrete Pressure(bar)

Output(m³/h)

— HEAD SIDE
- - - ROD SIDE

© Maximum theoretical values listed.

© Photos and drawings are for illustrative purpose only

© Dimension will vary with different truck makers, models and specifications

© Right to make technical amendments reserved